

GENERIC SERVING CART

(Item# FI-6129/ FI-6130/ FI-6131)



FOR CUSTOMER SERVICE, PLEASE WRITE OR CALL

FOREMOST INTERNATIONAL
906 MURRAY ROAD
EAST HANOVER, NJ07936

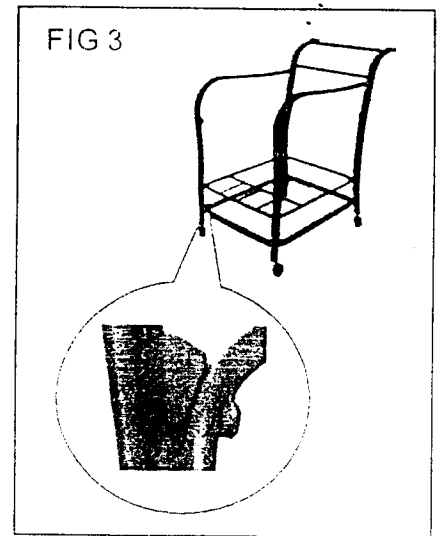
TEL: 800-443-1410

FAX: 973-428-6166

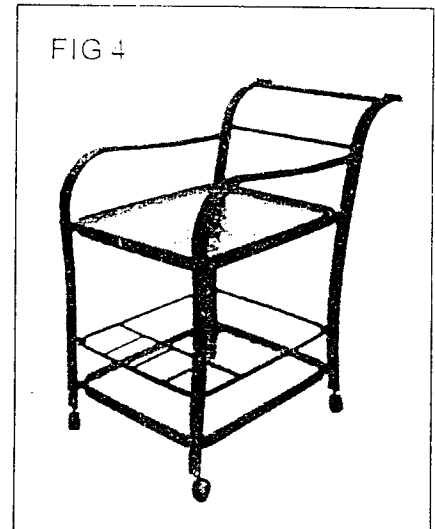
EMAIL: customerservice@foremostgroups.com

WEB SITE: www.fitnjo.com

5. Attach the Shelf Bracket (D) to the Back Leg Unit (A), Front Right Leg (B), and Front Left Leg (C) loosely. Align the 4 holes on the shelf bracket (D) by inserting the Bolt (F) through Plastic Washer (H) from Shelf Bracket (D) to secure into the Back Leg Unit (A) with the use of Hex Screw Driver (I). See Figure 3.














6. Repeat the same procedure of Step 4 to attach the Top Glass Shelf (E) on the upper of the serving cart. See Figure 4.



7. Tighten all Bolts with Hex Screw Driver (I) and cover them with the PVC Bolt Covers (G).

Your serving cart is now ready to use.

PARTS LIST

	Description	Picture	Qty
A	Back Leg Unit		1
B	Front Right Leg		1
C	Front Left Leg		1
D	Shelf Bracket		1
E	Glass Shelf		2
F	Bolt M6*25MM		4
G	PVC Bolt Cover		16
H	Plastic Washer		16
I	Hex Screw Driver		2
J	Bolt M6*30mm		4
K	Bolt M6*15mm		8

ASSEMBLY INSTRUCTIONS

1. Take all components out from the carton and place them on a flat surface area.
2. Identify all the parts packed in the carton against the parts list.
3. Attach the Front Right Leg (B) and Front Left Leg (C) into the Back Leg Unit (A) loosely. Align the holes on the Front Right Leg (B) to the Back Leg Unit (A) by inserting the Bolt (J) through the Plastic Washer (H) from the Back Leg Unit to secure into the Front Right Leg (B) with the use of Hex Screw Driver (I). At this point, please do not secure them tightly. See Figure 1. Repeat the same procedure for the Front left Leg (C).

Note: The numbered label on the Front Right Leg (A) and Front Left Leg (C) should coincide with the numbered label on the Back Leg Unit (A).

4. Attach the Glass Shelf (E) to the bottom holes of Back Leg Unit (A), Front Right Leg (B), and Front Left Leg (C) loosely. Align the 4 holes of the Glass Shelf (E) and insert the Bolt (K) through Plastic Washer (H) from the Glass Shelf (E) to secure into the legs with the use of Hex Screw Driver (I). See Figure 2.

Note: Do not tighten any bolts on this step.

